
## medTV<sup>16</sup>

## 16" Arm-mounted Patient TV





**NEW RF-HEMIS™** Centrally manage medTVs using the RF-HEMiS Head-end Management Integrated TV System by PDi. Set it and forget it.

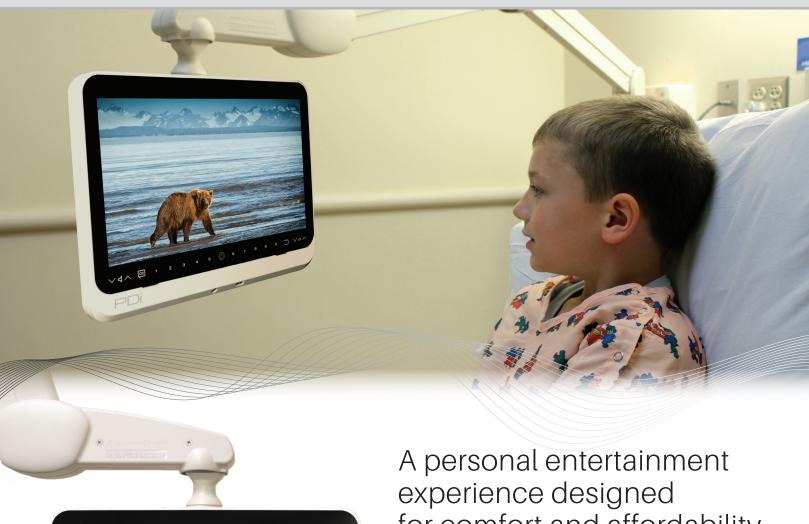

# for comfort and affordability

#### **ELEVATE EXPECTATIONS**

The medTV16 arm-mounted display reduces neck, back and eye strain by allowing patients to position the device for their viewing comfort. The medTV16 display is equipped with MPEG4 and Pro: Idiom giving access to more HD channels. Its simple touch keypad easily controls volume and channels.

#### SUPERIOR VIDEO AND AUDIO EXPERIENCE

The medTV<sup>16</sup> provides a high-quality full high-definition viewing experience equal with a 90" TV experience across the room. Patients appreciate the great audio with forwardfacing speakers.

#### **CLEAN DESIGN WITH SAFETY IN MIND**

The medTV<sup>16</sup> is designed for infection control. The full glass front and antimicrobial plastics are proven to help limit hospital acquired conditions (HACs) and are durable for rigorous cleaning.

mymedTV.com

#### **KEY FEATURES**



UL Listed, low voltage, widescreen HDTV powered by PDi



Easy access to favorite channels with direct entry channel buttons.



Forward-facing speakers and front headphone jack minimize noise and keeps the floor/unit quiet



New RF-HEMiS or easy USB cloning makes TV set-up and updates quick and simple



Password protected set-up menus prevent patients from altering settings with IR remotes or remote control phone apps



Channel aliasing and remapping allows facility to customize and simplify channel line-ups



Compatible with PDi swing arms or available as VESA 75 x 75 mm mount resulting in a mounting solution for any situation



Standard cabinet color is Starlight Gray



Designed and Assembled in USA from Domestic and International Components

#### PANEL

| Diagonal Size      | 15.6" (39.6cm) |
|--------------------|----------------|
| Display Resolution | 1920 x 1080    |
| Contrast Ratio     | 800:1          |
| Luminance          | 250 nits       |
| Backlight Type     | LED            |

#### INPUT/OUTPUT

| RF Input   | 1 (75ohm Unbalanced)              |
|--|-----------------------------------|
| НОМІ   | 1, Optional                       |
| ENET, CCI, MTI,<br>(call to inquire about<br>additional inputs<br>available) | Optional                          |
| Speakers   | 2x1.7-Watt RMS,<br>Patient Facing |
| Front Headphone  | Yes, 1/8" jack                    |
| Pillow Speaker   | Optional                          |
| REGULATORY   |                                   |

| UL/cUL 60065 Annex Q                | Yes |
|-------------------------------------|-----|
| FCC Title 15, Part 47,<br>Subpart B | Yes |

#### **TELEVISION STANDARDS**

| Antenna Input   | NTSC, ATSC, QAM (Air VHF/<br>UHF,CATV,IRC,HRC) |
|-----------------|--|
| Dolby Audio™    | Yes  |
| MPEG-4 & MPEG-2 | Yes  |
| Pro: Idiom®     | Yes  |

#### SAMPLE OF SET-UP FEATURES

|  | Dower over Coover          |
|--|----------------------------|
| POWER  |                            |
| Factory Reset  | Yes                        |
| Menu OSD   | English/French/<br>Spanish |
| Channel Aliasing/<br>Remapping   | Yes                        |
| Channel Enable/Disable   | Yes                        |
| Password Protected Set Up<br>Menus                                       | Yes                        |
| Programmable Source<br>Selection   | Yes                        |
| Auto Power On  | Yes                        |
| Parental Control (V-CHIP)  | Yes                        |
| PDi Program Remote<br>Compatible   | PD108-420                  |
| USB or RF-HEMIS<br>Cloning Capable<br>- TV Cloning<br>- Firmware Updates | Yes                        |
| Start/ Power-on Volume   | Yes                        |
| Min/Max Volume Limiter   | Yes                        |
| Internal Speaker Disable   | Yes                        |
| Audio Volume Limiter   | Yes                        |

| Source                          | Power over Coax or<br>Power over Ethernet |
|---------------------------------|---|
| Max Consumption                 | 25W                                       |
| Standby Consumption<br>- Normal | 8W  |
| Standby Consumption<br>- Low    | 2W  |

#### **DIMENSIONS**

| Weight                             | 7 lbs (3.2 kg)       |
|------------------------------------|----------------------|
| Unit Dimension - Swivel<br>(W/H/D) | 15.2" x 14.8" x 2.5" |
| Unit Dimension - VESA<br>(W/H/D)   | 15.2" x 11.3" x 2.5" |

#### PART NUMBERS

| PDI-P16TV-GA-C  | 16" Arm-mounted ATSC/Pro:Idiom HDTV, Gray, Coax Cable, Coax Power                             |
|-----------------|---|
| PDI-P16TV-GB-C  | 16" Arm-mounted ATSC/Pro:Idiom HDTV, Gray, Coax + CCI, Coax Cable, Coax Power                 |
| PDI-P16TVR-GA-C | 16" Rear VESA mounted (75 x 75) ATSC/Pro:Idiom HDTV, Gray, Coax Cable, Coax Power             |
| PDI-P16TVR-GB-C | 16" Rear VESA mounted (75 x 75) ATSC/Pro:Idiom HDTV, Gray. Coax + CCI, Coax Cable, Coax Power |
|                 |   |

\* Part numbers vary based on custom cable, color, or power options. Call for more information.

The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. Dolby, Dolby Audio, and the double-D symbol are trademarks of Dolby Laboratories.

### Pro:Idiom





Standard 3 year Warranty. 5 year Gold Vision Service (GVS) Warranty Available.

NOTE: Some screen images are simulated. Dimension and weights are approximate. Design specifications and features are subject to change without notice



©2020 PDi Communication Systems, Inc.