

- Super-IPS panel with 176° Horizontal and Vertical viewing angles
- Theft resistant wall mounting bracket included
- Built-In Pillow Speaker Interface with analog, digital and digital direct access control
- Enhanced Pillow Speaker Function — Allows power on/off and the TV A/V switch to be accessed through the pillow speaker
- UL and cUL Certified for Healthcare Use (6500)
- Energy Star qualified product
- OSHA and OSHPD exempt mounting configurations



PDi P20LCD 20.1" LCD Television

PDi™

PDi Communication Systems
 40 Greenwood Lane
 Springboro, Ohio 45066
 p. 937 743-6010/1 800 628-9870
 f. 937 743-5664
www.pdiarm.com




Inova²⁰

Inova 20

- 4 by 3 Aspect Ratio
- 640 by 480 Resolution
- Color Depth 16M
- 400:1 Contrast Ratio
- 450 cd/m2 brightness
- 40K Hours Lamp Life
- Closed Captioning
- 1/4" Phono Input for Pillow Speaker
- 100mm VESA Mounting Pattern
- V-Chip with ability to Set on to activate V-Chip (Parental Control)
- *Start Channel* — When active, this function allows the user to determine the initial channel when the TV is turned ON
- *Start Volume* — This function allows the user to determine the initial volume level setting when the TV is turned ON

PDI

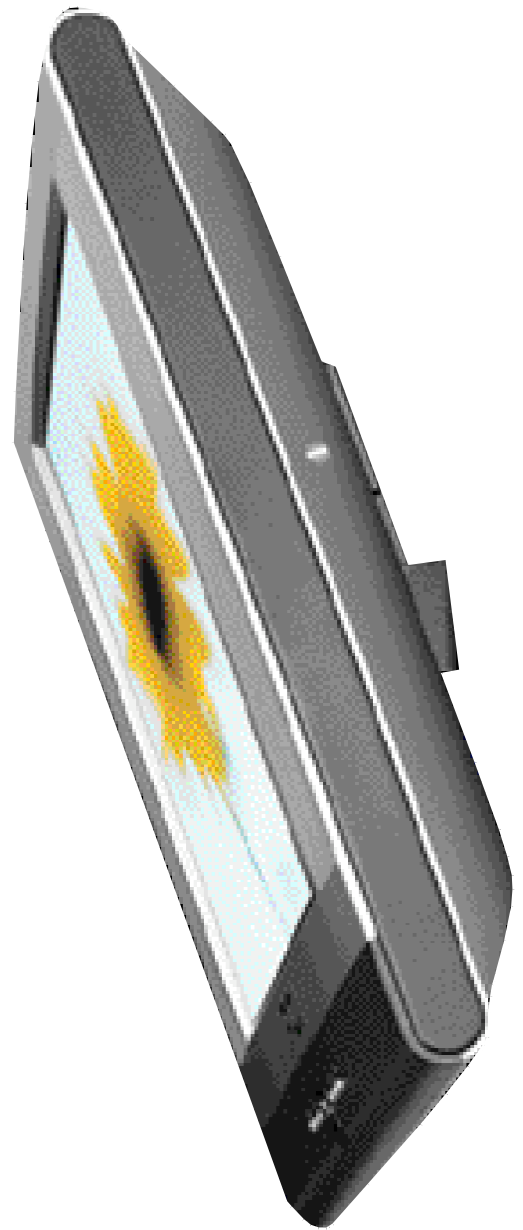

- *Minimum Volume* — This function determines the minimum volume level allowable with the Volume Up/Down control.
- *Maximum Volume* — This function determines the maximum volume Level allowable with the Volume Up/Down control.
- *Channel Lock* — Anytime the television is powered on the TV will always be on the same channel. Channel Up/Down will have no control over the television.
- *Lock-out* — When turned on the Menu and A/V switch on the front of the set are disabled.
- *Channel Override* — When set to off position, the user can select channels with either Channel Up/Down or by direct keypad entry. When set to on position, only those channels that are entered for scanning may be selected by direct keypad entry.
- *Caption Lock* — When function is on, previous Closed Caption On/Off state is restored after TV turns off. When function is off, the captions are always off when TV is initially turned on.
- *Four Programmable Memory Banks* — Each memory bank can include up to 125 channels in CATV mode. Memory Banks 1-3 can be independently programmed and have the ability to copy and clear any memory bank. Bank 4 is used to lock the TV in the "off" state.
- *Clone Programmer* — Program one TV with all settings then transfer the settings to every similar set in the system.
- *Bed A and Bed B IR Remote Settings* — Allows two televisions to be in the same room without the IR signals interfering with one another.
- *Auto Power ON* — When set to on position, television powers up any time power is applied. When set to off position, television functions normally.
- *Auto Programming* — Automatically programs TV to available channels and selects tuning band that is available.
- *Power Management* — Allows the flexibility to automatically power off the television after a specific period of inactivity.
- "CCI" Interface port for computer control interface.
- Complete unit (including Television, Power supply brick and Power Cord weighs less than 18 pounds 10 ounces (8.448 KG).
- Ceiling, table and optional wall mounting solutions available.

